


SPECIFICATION SHEET FOR Cl_2 SENSOR COMPACT

CL2-7/20

Nominal Range 0 – 20 ppm
 Maximum Overload 200 ppm
 Expected Operation Life 2 years in air
 Output Signal -30 +/- 10 nA/ppm
 Resolution <0.05 ppm
 Temperature Range - 40 °C to + 50 °C
 Pressure Range Atmospheric +/-10 %
 t_{90} Response Time < 50 sec
 Relative Humidity Range 15 % to 90 % R.H. non-condensing
 Typical Baseline Range (pure air, 20°C) – 0.1 ppm to +0.2 ppm
 Maximum Zero Shift (+20°C to +40 °C) 0.5 ppm equivalent
 Expected Long Term Output Drift < 2 % signal loss/month
 Recommended Load Resistor 10 Ohm
 Bias Voltage Not required
 Repeatability < 2 % of signal
 Output Linearity Linear

Weight ~ 13 g
 Position Sensitivity None
 Storage Life Six months in container
 Recommended Storage Temperature 5 °C – 20 °C
 Warranty Period 12 months from date of dispatch

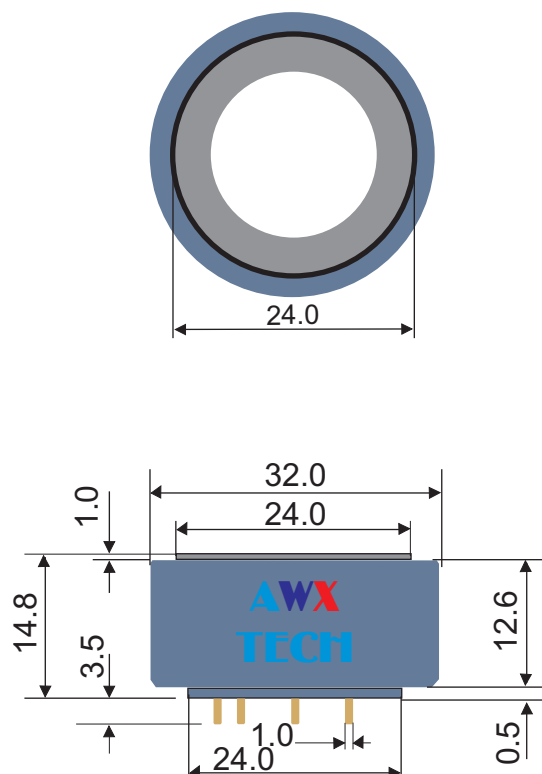

PERFORMANCE CHARACTERISTICS CROSS-SENSITIVITY DATA

Interfering Gas Concentration Reading
 Br₂ 20 ppm < 3 ppm
 ClO₂ 3 ppm < 3 ppm
 Br₂ 10 ppm < 10 ppm

Performance data conditions:
 20 °C, 50% RH and 1013 mbar

APPLICATIONS

Safety and Environmental Control
 For Portable Gas Detectors

